
ALU DOOR.



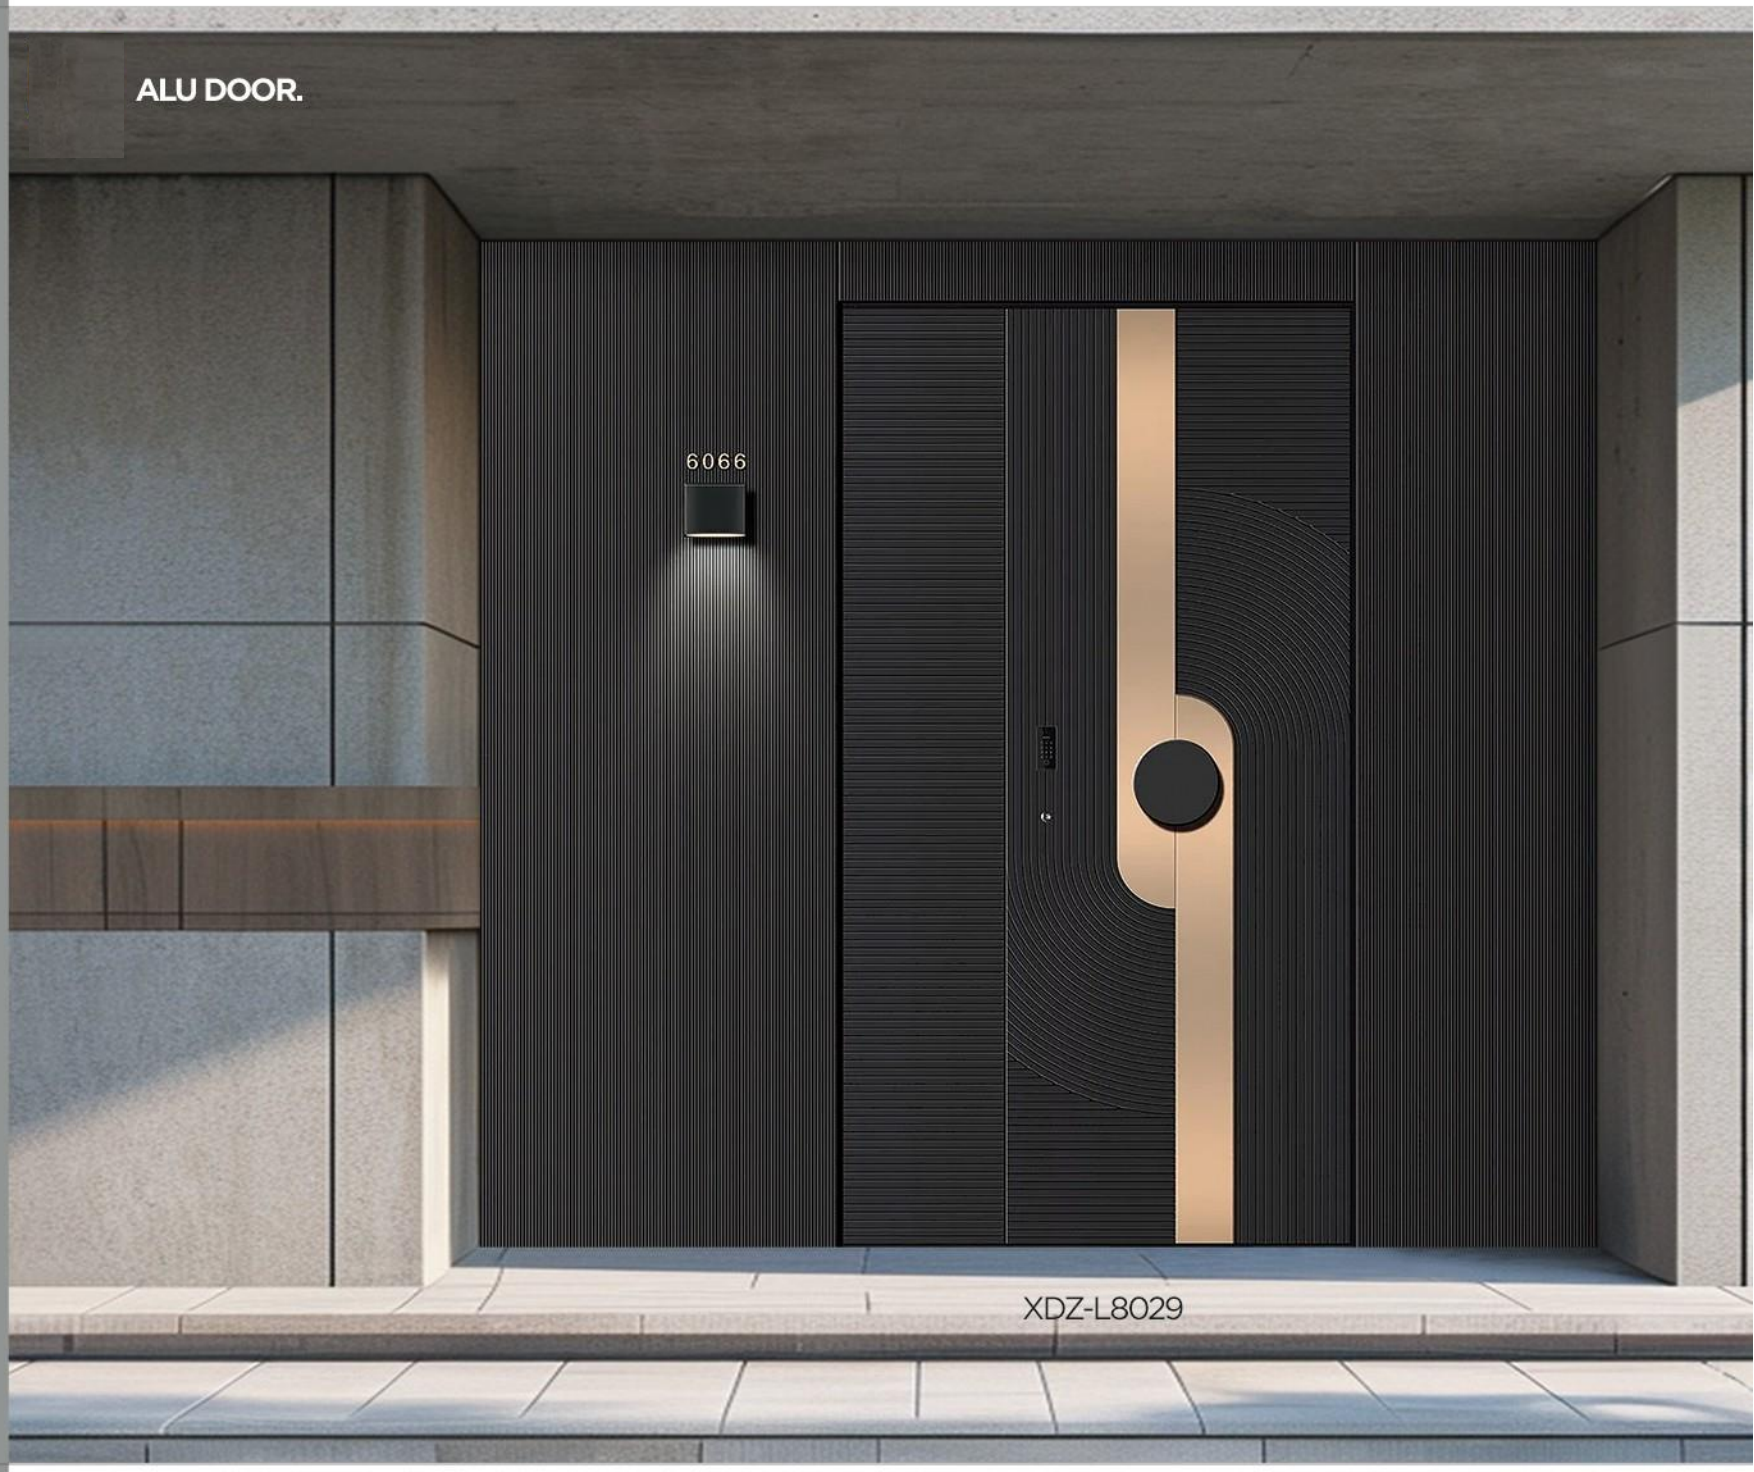

"A UNIQUE SCENE FOR EACH DOOR"
ARMORED DOUBLE-LEAF DOOR

ALU DOOR.

Technology:All aluminum through shaft

Size:1460*2800mm

Thickness:97mm

Door frame:2mm Zinc alloy

External material:4mm aluminum plate engraving+4mm aluminum plate

Internal material:8mm Technological Wood Panel

Hinge:common bearing type

Filler:Sound insulation and heat insulation (polystyrene board)

Lockset:Embedded face recognition fingerprint lock



ALU DOOR.





"A UNIQUE SCENE FOR EACH DOOR"
ARMORED DOUBLE-LEAF DOOR

ALU DOOR.

Technology:All aluminum through shaft

Size:1460*2800mm

Thickness:97mm

Door frame:2mm Zinc alloy

External material:4mm aluminum plate engraving+4mm aluminum plate

Internal material:1.5mm Zinc alloy


Hinge:common bearing type

Filler:Sound insulation and heat insulation (polystyrene board)

Lockset:Embedded face recognition fingerprint lock



The back

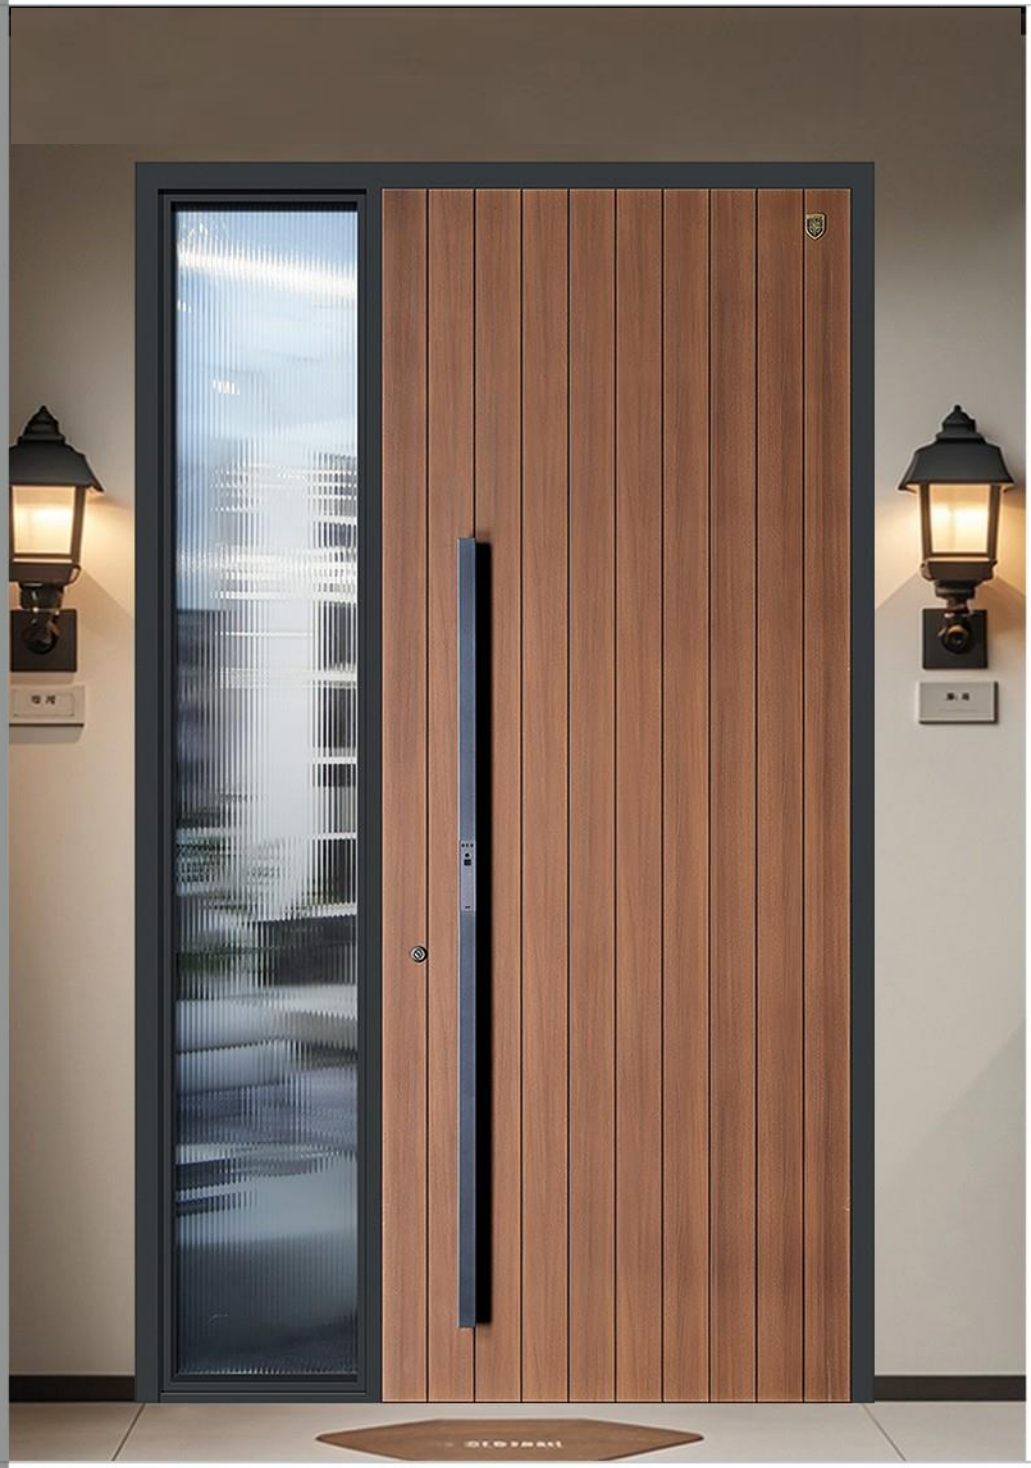

XDPZ-190

EXTRAORDINARY S SERIES

Technology:Bridge breaking system door
Door Size:1790*3100mm

Thickness:90mm
Colour:Imported natural wood veneer texture+porcelain sliver black
Door frame:4mm aluminum profile
External material:6mm Aluminum plate fine carving
Internal material:9mm multi-layer painted wooden board
Hinge:Precision casting invisible hinge
Filling material:aluminum foil filling;
Lockset:Face recognition embedded fingerprint lock



The back



XDPZ-198

3MM ALU DOOR

Door size:870*2170mm;

Door leaf:85mm;

Frame:2.0mm Galvanised steel;

Front Surface:3mm Alu+1.0mm Galvanised s

Back surface:1.0mm Galvanised steel;

Filling material: Rock wool;

With smart lock;



The back

ALU DOOR.



XDPZ-199

EXTRAORDINARY O SERIES

Technology:All aluminum through shaft

Door Size:1790*2500mm

Thickness:119mm

Colour:Brass gold

Door frame:4mm aluminum profile

External material:6mm aluminum plate engraving+4mm aluminum plate

Internal material:9mm multi-layer painted wooden board


Hinge:common bearing type

Filling material:aluminum foil filling;

Lockset:Embedded face recognition fingerprint lock



The back

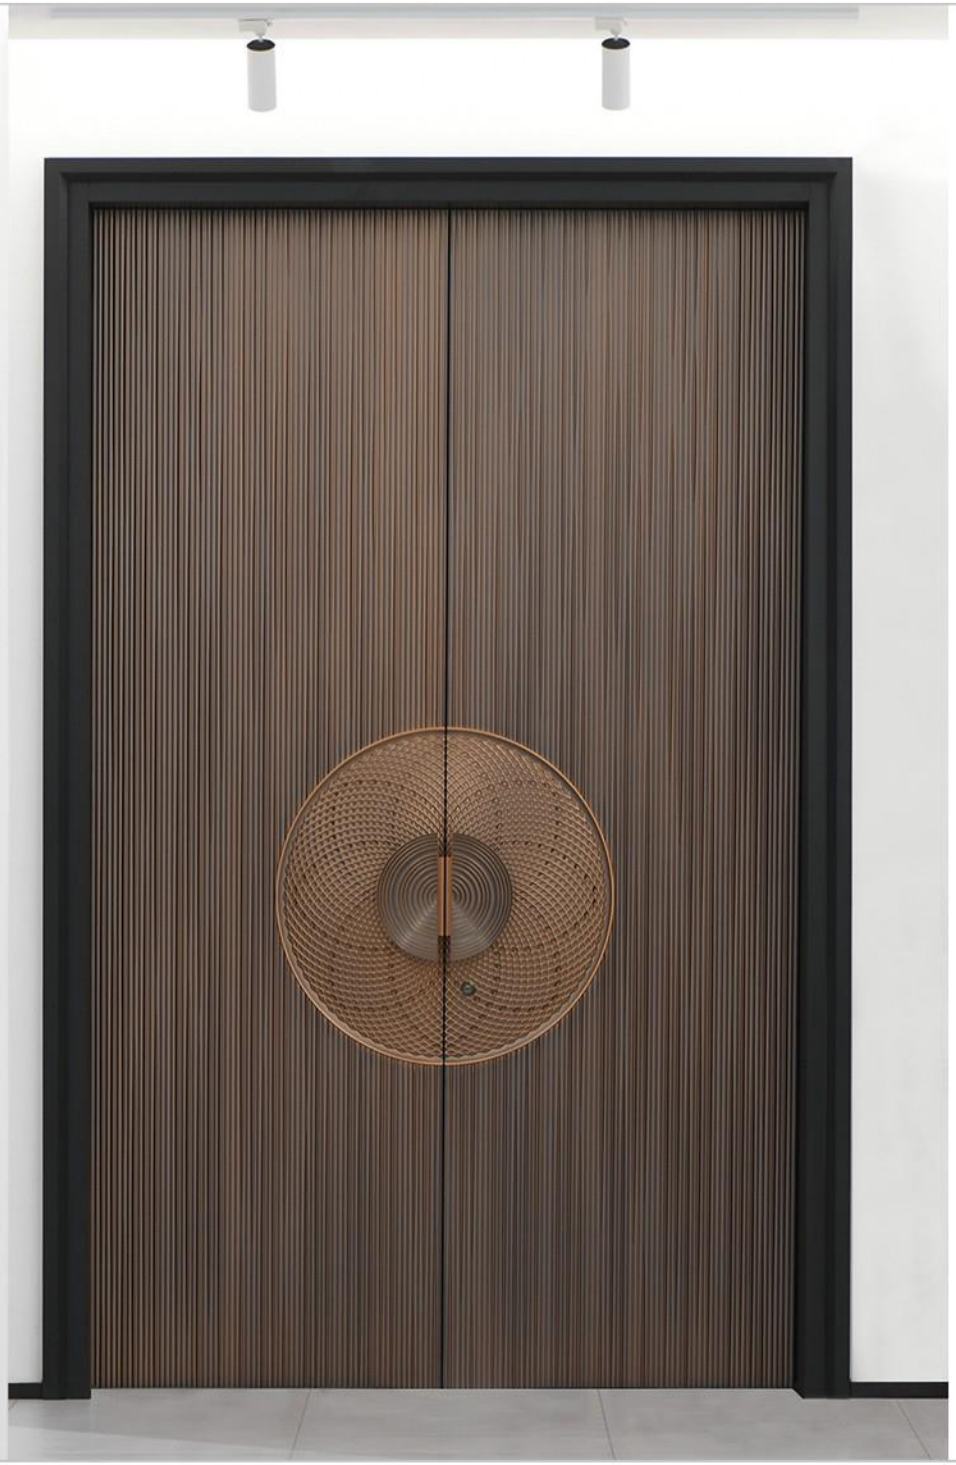

XDZ-LSLH

EXTRAORDINARY O SERIES

ALU DOOR.

Style name: Terrestrial Lotus - PL25C030026
Size: 1980mm*3130mmFront panel material: 8mm aluminum panel with texture relief
Back panel material: 12mm multi-layer baked paint wood panel stainless steel splicing
Techn: Bright hinge technique
Door frame: 2.0mm zinc alloy steel plate
Lock: QZ-3 wall-mounted facial fingerprint lock
Handle: Fine-car aluminum sliding lid handle
Color: Nanometer brass mother-of-pearl black sand



The back

ALU DOOR.



EXTRAORDINARY O SERIES

Style name: Jiangchu Da Bei-PL25C030027

Size: 1980mm*310mm

Front panel material: 6mm aluminum plate with texture relief

Back panel material: 12mm carbonized logwood board


Technology: Hidden hinge technologyDoor frame: 2.0mm zinc alloy steel plate

Lock: QZ-3 wall-mounted facial fingerprint lock

Handle: Fine-carved aluminum handle laid abalone

Color: Black sand pearl lock edge color black gold copper



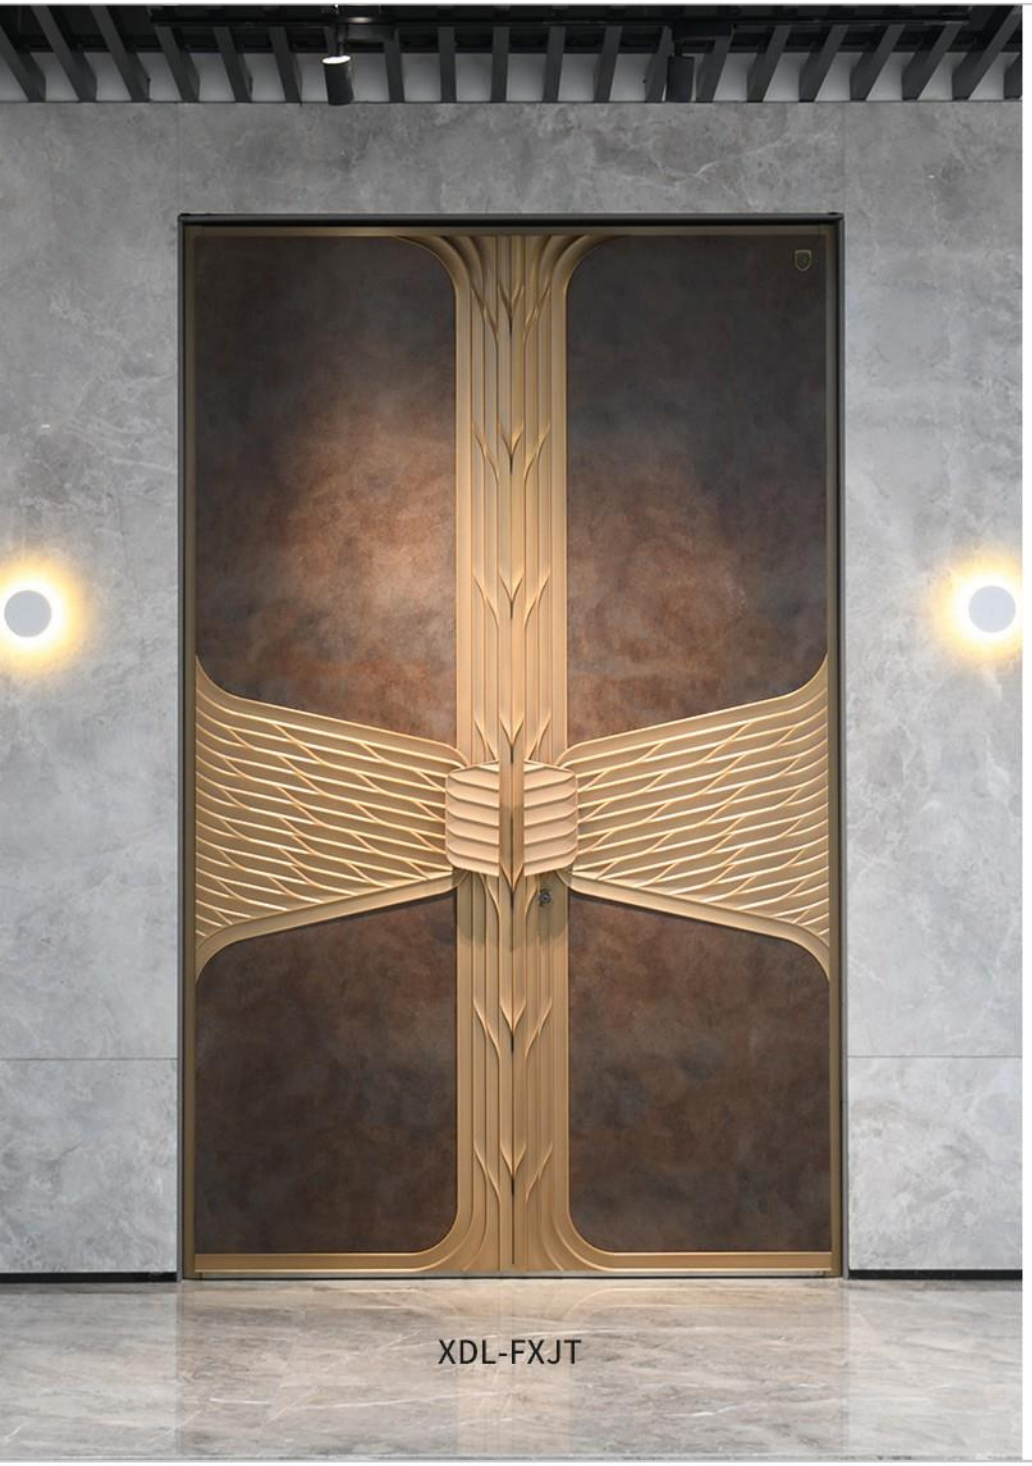

EXTRAORDINARY O SERIES

ALU DOOR.

Style name: Phoenix Soaring to the Nine Heav-ens-PL25C030028

Size: 1800mm2880mm

Front panel material: 12mm aluminum plate with texture relief 3mm aluminum plate inlay

Back panel material: 9mm multilayer paint-free plywood (other options available)

Craftsmanship: Hidden hinge installation (can be done with visible hinge craftsmanship, hidden hinge craftsmanship)

Do frame: 2.0mm zinc alloy steel plate

Lock: F3 embedded facial fingerprint lock

Handle: Slider cover finely carved aluminum handle

Color: Nanometer brass 5D printing



ALU DOOR.

XDPZ-193



The back

ALU DOOR.

XDZ-L8001

XDZ-L8018

XDPZ-195

PIVOT DOOR.



XDL-HCMZ

PIVOT DOOR

Style name: Haichu Zhujinyi Door and Scene - PL25C030019

Size: 146mm*2680mm

Front panel material: 4mm aluminum panel with texture relief

Back panel material: 12mm multi-layer baked paint wood panelother options available)

Technique: System off-axis door technique

Door frame: Broken bridge aluminum door frame


Lock: CD9006 wall-mounted fingerprint lock

Handle: Fine-carved aluminum handle inlaid rock slab

Color: Yellow brass texture color scheme



The back

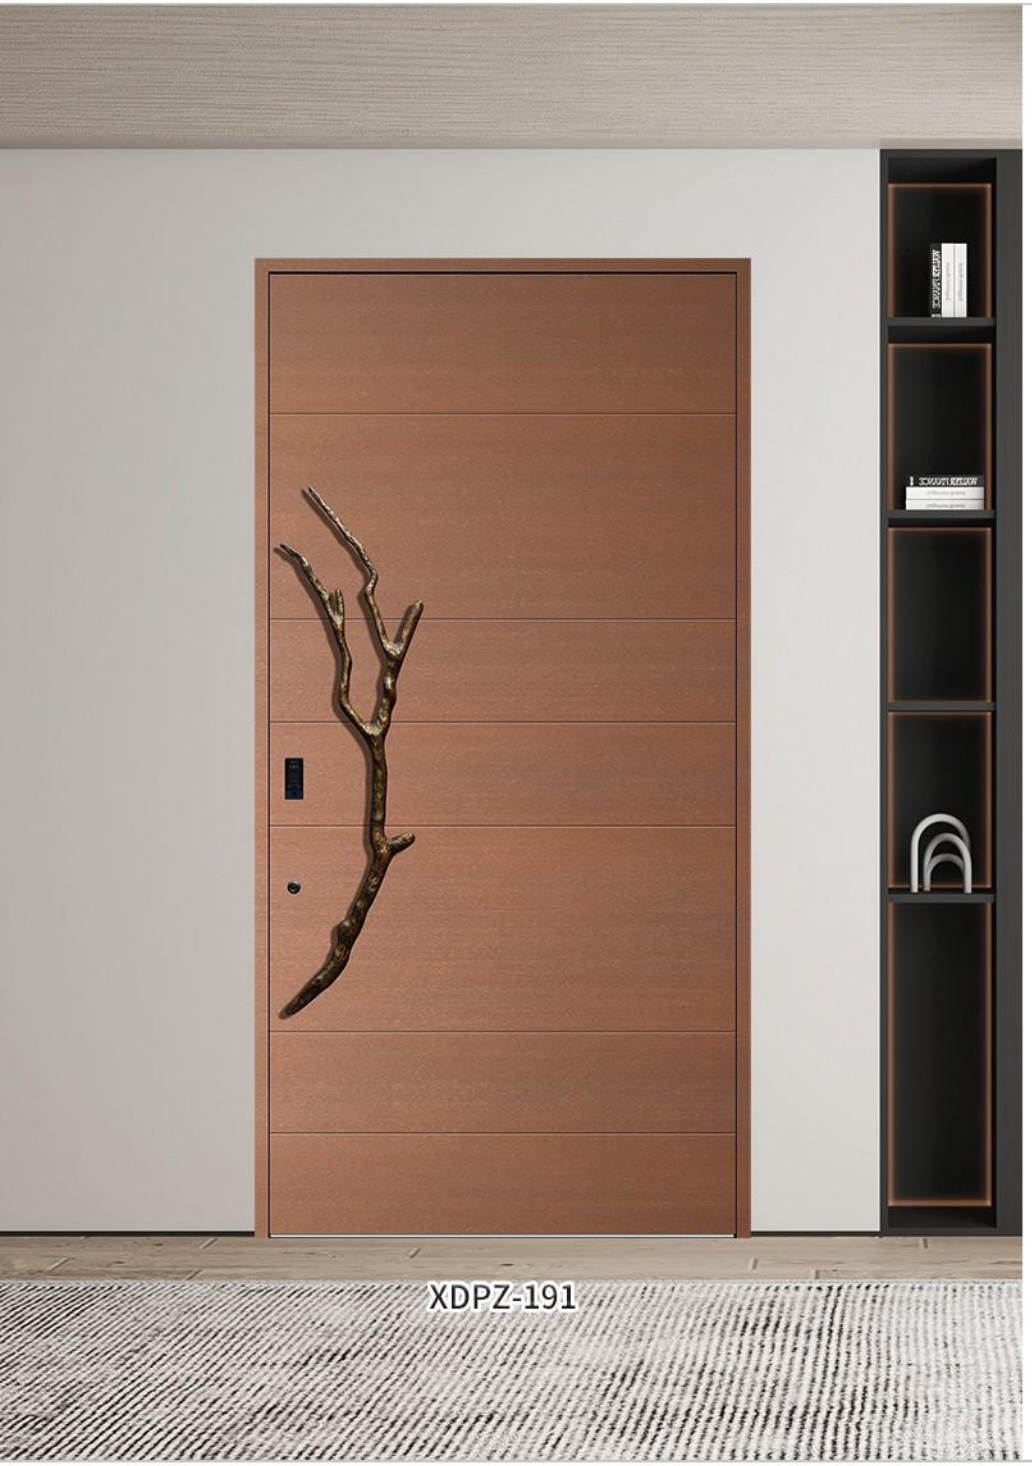

PIVOT DOOR

PIVOT DOOR.

Technology :The off-axis door with the broken bridge system Size: 1460*2880 Thickness: 80

Colour: : Imported natural wood veneer texture Door frame:4mm aluminum profle

External material:6mm Aluminum plate fine carving

Internal material;9mm multi-layer painted wooden board

Bearing: Netherlands FRITISJURGENS

Filler: Soundproof and heatproof polyurethane foam filling

Sealing strip: Soundproof,heatproof,waterproof and windproof EPDM sealing strip


Lockset:Face recognition embedded fingerprint lock

Doorknob:Lucky deer art handle



The back

1 PIVOT DOOR.

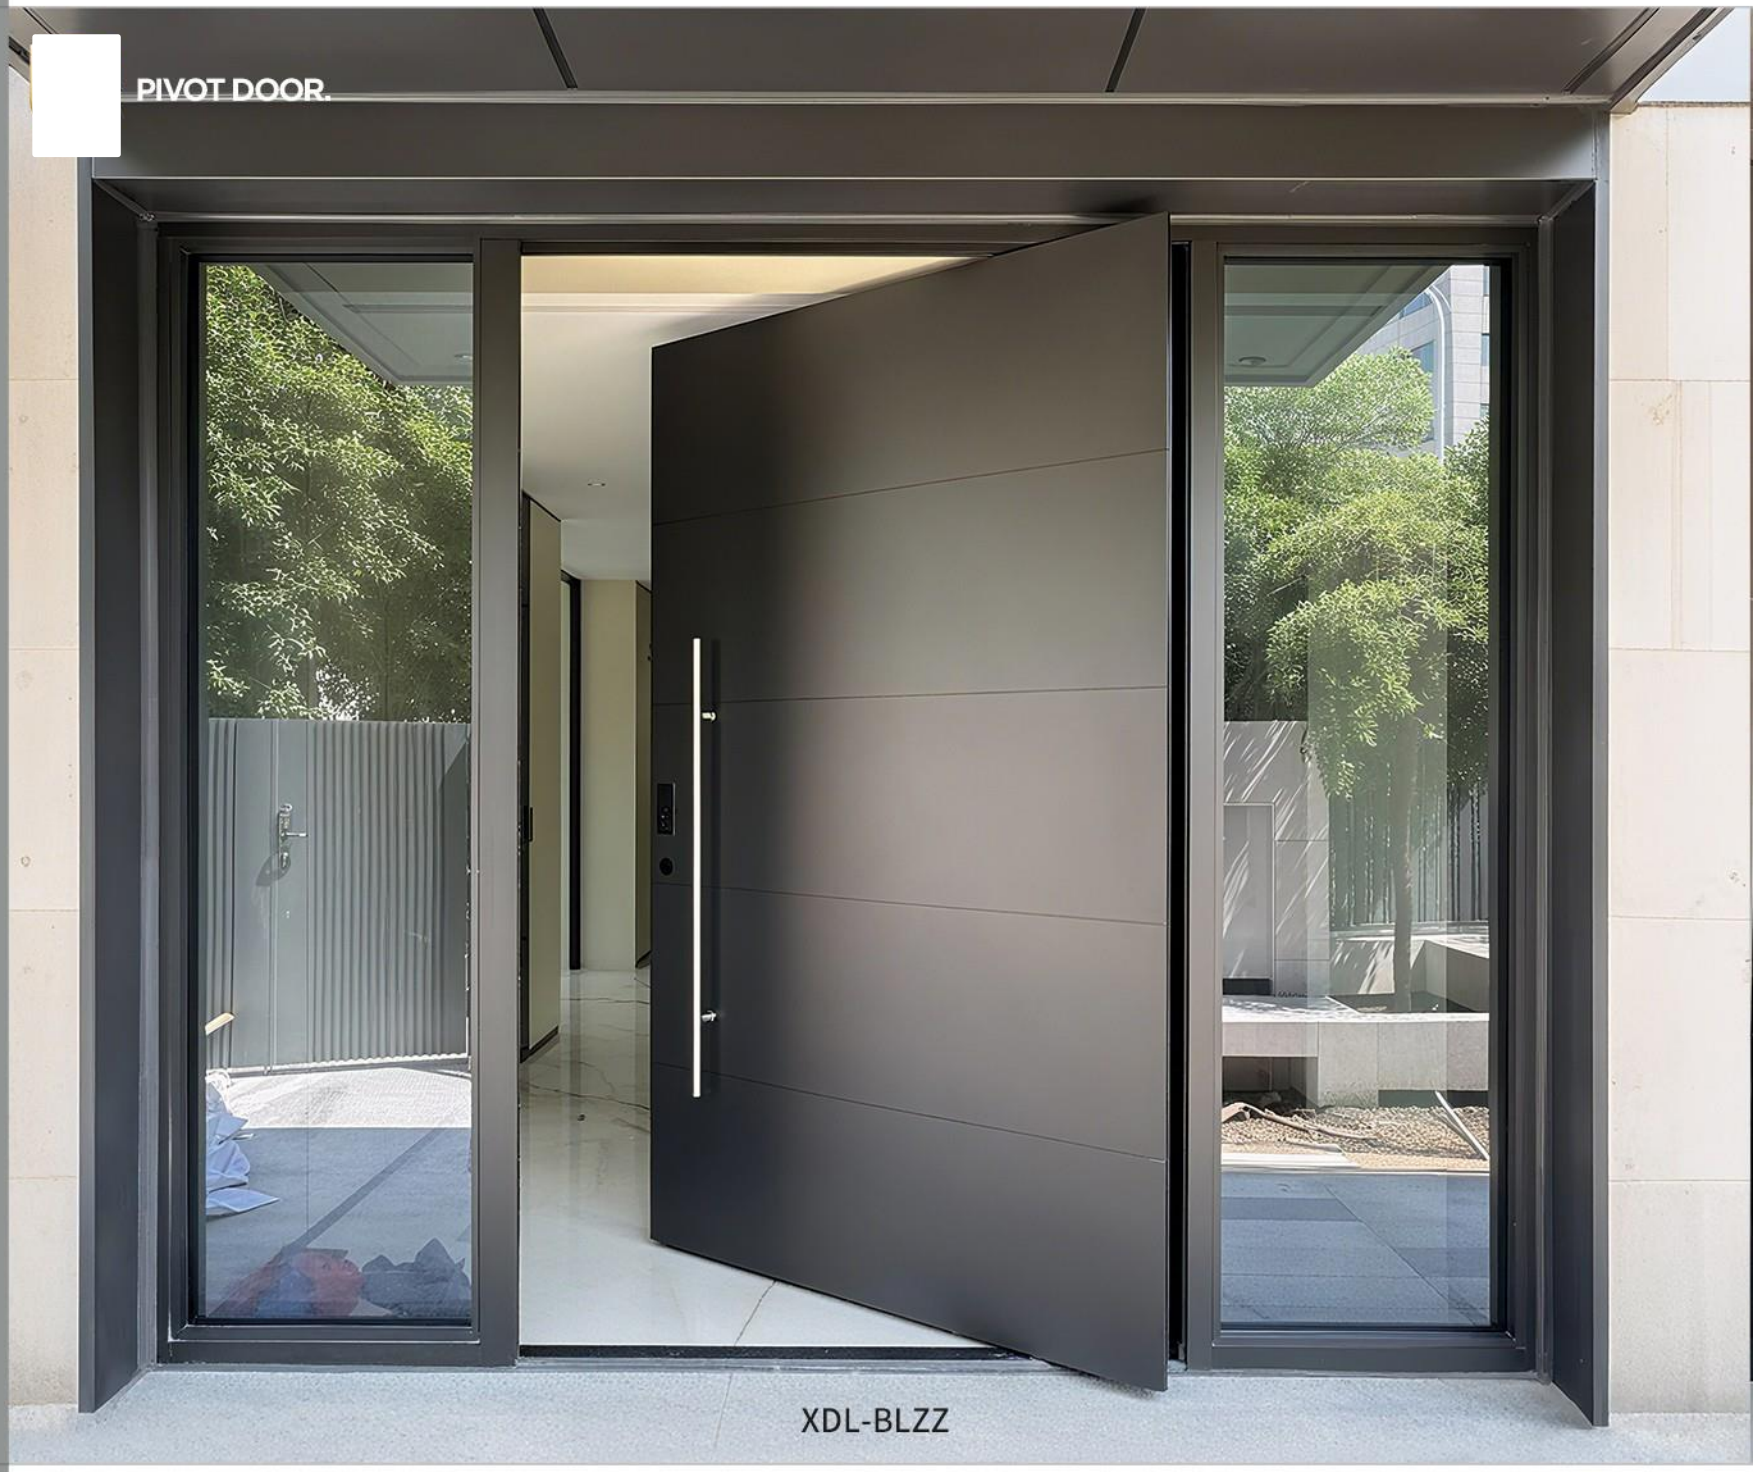

XDL-BLZZ

PIVOT DOOR.



XDL-HSZZ

HIGH-END ENTRANCE DOOR.



XD-8122

configuration

Door leaf: 1.0 Zinc-iron alloy embossed plate+ Internal 1.0 galvanized sheet
Door frame: Grille stripe profile inlay
Craftsmanship: One-stop craftsmanship
Thickness: 100mm
Level: Class A
Handle: Mechanical handle
Filler: Partial aluminum foil filling
Anti-theft: 9-pin anti-theft lock
Lock: Class C lock
Hinge: Visible hinge concealed installation
Sealing strip: EPDM sealing strip
Sill: Stainless steel sill
Height: 2280(With high door head)
Standard size: 2050*860, 2050*960, 2050*1050, 2050*1160



Open effect



XD-8105

HIGH-END ENTRANCE DOOR.

configuration

Door leaf: 1.5 Magnesium alloy steel carving+ rear 1.0 galvanized sheet
Door frame: Grille aluminum wire inlay technology
Thickness: 90mm
Level: Class A
Handle: Zinc alloy mechanical handle
Filler: Foam filling
Pick-proof: 4mm full solid anti-skid steel
Structure: T-structure No stuck edge process
Hinge: Visible hinge concealed installation
Sill: Panda flower type stainless steel double composite sill
Height: 2280(Standard 2050)
Standard size: 2050*860, 2050*960, 2050*1050, 2050*1160



Open effect

HIGH-END ENTRANCE DOOR.

FLOWERY BRANCH DOOR


Parameters: 0.8mm steel plate outside, 0.8mm steel plate inside

Filling: honeycomb paper;

Door frame 1.5mm steel plate;

Bright window is: 5mm tempered glass galvanized square steel flower branch 5mm tempered glass

Size: 1650*2800

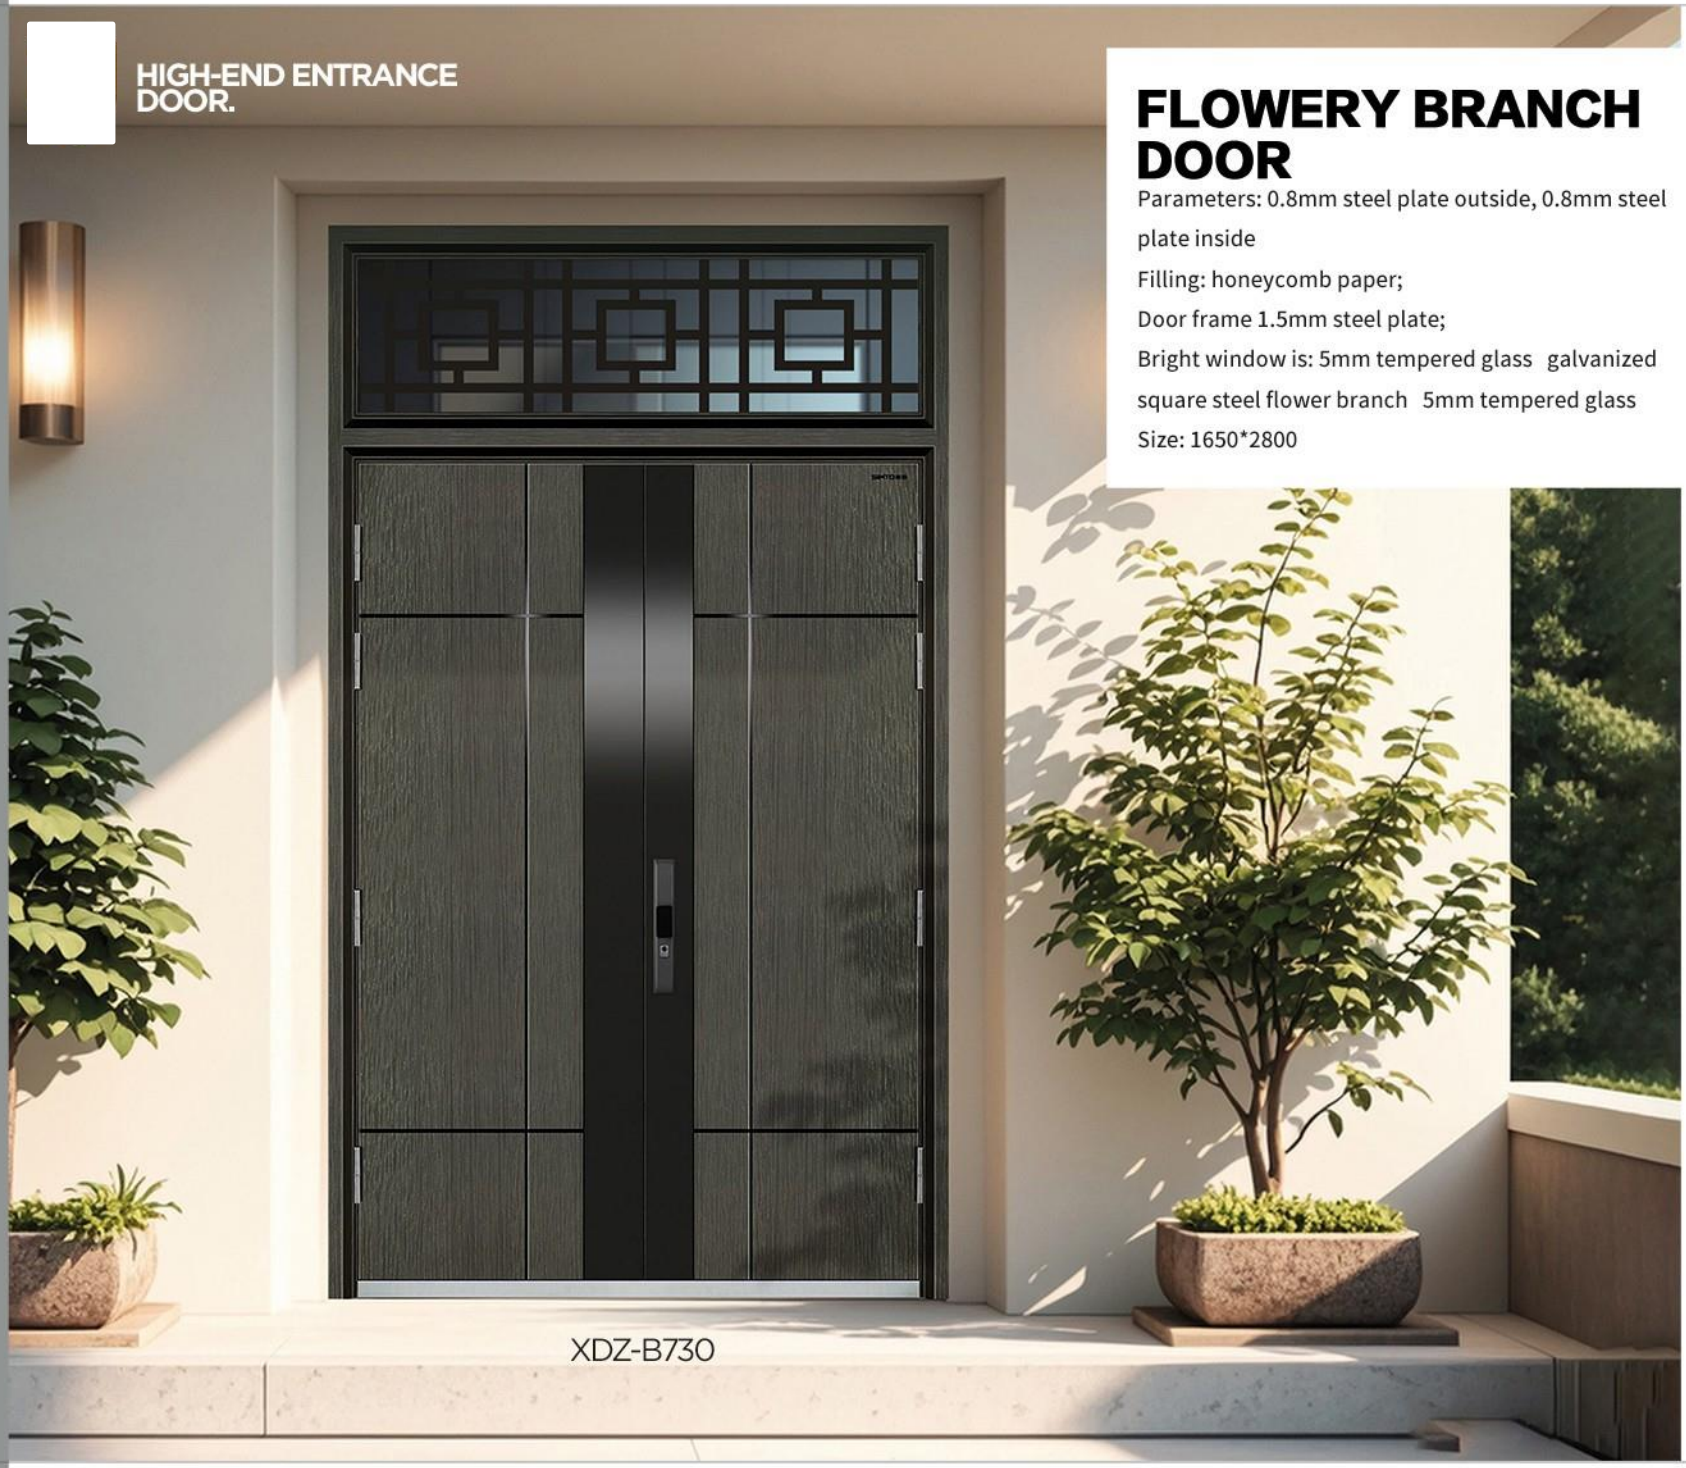

XDZ-B730

HIGH-END ENTRANCE DOOR.



XD-8123

configuration

Door leaf: 1.0 Zinc-iron alloy embossed plate+ Internal 1.0 galvanized sheet
Door frame: Grille stripe profile inlay
Craftsmanship: One-stop craftsmanship
Thickness: 100mm
Level: Class A
Handle: Mechanical handle
Filler: Partial aluminum foil filling
Anti-theft: 9-pin anti-theft lock
Lock: Class C lock
Hinge: Visible hinge concealed installation
Sealing strip: EPDM sealing strip
Sill: Stainless steel sill
Height: 2280(With high door head)
Standard size: 2050*860, 2050*960, 2050*1050, 2050*1160



XD-8125

configuration

Door leaf: Galvanized sheet + 4mm carved aluminum sheet + Internal 1.0 galvanized sheet
Door frame: Grille stripe profile inlay
Craftsmanship: One-stop craftsmanship
Thickness: 100mm
Level: Class A
Handle: Mechanical handle
Filler: Partial aluminum foil filling
Anti-theft: 9-pin anti-theft lock
Lock: Class C lock
Hinge: Visible hinge concealed installation
Sealing strip: EPDM sealing strip
Sill: Stainless steel sill
Height: 2280(With high door head)
Size: 2050*860, 2050*960, 2050*1050, 2050*1160



XD-8132

configuration

Facade: Front 1.5 steel plate, Rear 1.0 steel plate Door frame: 2.0 steel plate
Thickness: 92mm Grade: Grade 4
Craftsmanship: Invisible door lintel from one door to the top Craftsmanship Filling: Foam+Steel keel
Handle: Mechanical Handle Lock Body
Lock Core: 9-Head Lock Pure Copper Lock Core
Hinge: concealed hinge (can be opened 160°) lower sill: double-layer stainless steel lower sill
Sealing strip: EPDM sealing strip
Size: 2050 * 860 2050 * 960 2150 * 960 2250 * 9602050 * 10502150 * 1050 2250 * 1050 2050 * 1160 2150 * 1160 2250 * 1160



XD-8133

configuration

Front surface: 1.0 steel plate Door frame:2.0steel plate
Thickness:90mm Level: 4
Process: invisible doorway door to top process
Fill: foam + gold steel dragonbone
Lock: Embedded Face Fingerprint Lock Hand Grip: Aluminum-framed hand grip
Lock cylinder: Standard 9-head lock, Class C cylinder Hinges: Dark hinges (up to 160°) thresholdLower Threshold:double layered stain-less steel lower Seal: Triumethane seal
Dimensions: 2050*860 2050*960 2150*960 2250*960 2050*10502150*1050 2250*1050 2050*1160 2150*1160 2200*1160

HIGH-END ENTRANCE DOOR.



XD-8137

configuration

facade: front and back 1.0 steel plate
door frame: 2.0 steel plate
thickness: 100mm
grade: 4th grade
craftsmanship: T-shaped one-piece to the top process
handle: mechanical handle
filling: foaming steel skeleton
lock: -head one-gear lock with side lock
hinge: exposed hinge hidden installation
sealing strip: EPDM sealing strip
threshold: double-layer stainless steel



XD-8139

configuration

facade: 1.0 golden silk pattern embedded aluminum profile
door frame: 2.0 galvanized plate
thickness: 9mm
grade: 4th grade
craftsmanship: T-shaped one-piece to the top process
handle: mechanical handle
filling: foaming diamond dragon
lock: 9-head one-gear lock
hinge: exposed hinge hidden installation
sealing strip: EPDM sealing strip
lower sill: double-layer steel lower sill



XD-8151

configuration

facade: 1.0 transfer printing inlaid stainless steel
door frame: 2.0 steel plate
thickness: 10mm
grade: 4th grade
craftsmanship: steel broken bridge one door to the top T-type process
handle: mechanical handle
filling: foaming dragon bone
lock: 28mm stainless steel integral lock
hinge: exposed hinge concealed installation
sealing strip: EPDM sealing strip
threshold: double- stainless steel threshold



XD-8152

configuration

facade: 1.0 transfer printing inlaid aluminum trim strip
door frame: 2.0 steel plate
thickness: 10mm
grade: 4th grade
process: steel broken bridge one door to the top T-type process
handle: mechanical handle
filling: foaming diamond bone
lock: 28mm stainless steel integrated lock
hinge: exposed hinge concealed installation
sealing strip: EPDM sealing strip
lower sill: doublelayer stainless steel lower sill

HIGH-END ENTRANCE DOOR.



XD-8136

configuration

facade: 0.8mm golden wire pattern steel plate
door frame: 1.5mm steel plate
thickness: 100
craftsmanship: T-shaped one-piece to the top process
filling: honeycomb paper
lock: 9-head one-gear lock
handle: no is provided
hinge: exposed hinge installed
sealing strip: EPDM sealing strip
lower sill: double-layer stainless steel lower sill
size: 60*2050 960*2150 1050*2150 1050*22501160*2050 1160*2150



XD-8138

configuration

facade: front and back 1.0 steel plate
door frame: 2.0 steel plate
thickness: 95mm
grade: 4th grade
craftsmanship: hidden installation with small gap, one door to the top process (can open 160°)
handle: mechanical handle
filling: foaming
lock: 9-head one-gear lock
sealing strip: covered sealing strip
lower sill: double-layer stainless steel lower sill
size: 960*2050 960*2150 1050*2050 1050*2150 1160*20501160*2150



XD-8150

configuration

facade: 1.0 lock edge strip 3mm engraved aluminum plate
door frame: 2.0 steel plate
thickness:100mm
grade: 4th grade
craftsmanship: T-shaped one-door to the top process
handle: mechanical handle
filling: honeycomb paperlock: 9-head one-gear lock
hinge: exposed hinge hidden installation
sealing strip: EPDM sealing strip
threshold: double-layer stainless steel
size: 960*2050 960*2150 1050*2050 10502150 1160*20501160*2150



XD-8153

configuration

ffacade: 2.0 magnesium alloy steel sculpture
door frame: 2.0 galvanized plate
thickness: 92mm
grade: 4th grade
craftsmanship: T-shaped one-door to the top process
handle: mechanical handle
filling: foaming diamond dragon bone
lock 9-head one-gear lock
hinge: exposed hinge hidden installation
sealing strip: EPDM sealing strip
threshold: double-layer stainless steel
size: 960*2050 960*2150 1050*2050 1050*250 1160*20501160*2150

HIGH-END ENTRANCE DOOR.



XD-8112

configuration

Door leaf: 3mm carved aluminum plate + rear 1.0 galvanized plate
Door frame: Grille aluminum wire inlay technology
Craftsmanship: One-stop craftsmanship
Thickness: 90mm
Level: Class A
Handle: Zinc alloy mechanical handle
Filler: Aluminum honeycomb filling
Anti-theft: 4mm solid anti-pry steel
Lock: Class C lock
Structure: T-structure No stuck edge process
Hinge: Visible hinge concealed installation
Sealing strip: EPDM sealing strip
Sill: Panda flower type stainless steel double composite sill
Height: 2280(With high door head)
Size: 2050*860, 2050*960, 2050*1050, 2050*1160



XD-8111

configuration

Door leaf: 3mm carved aluminum plate + stainless steel inlay + front and rear 1.0 galvanized plate
Door frame: Grille aluminum wire inlay technology
Thickness: 90mm
Level: Class A
Handle: Aluminum handle with light
Filler: Aluminum honeycomb filling
Anti-theft: 4mm solid anti-pry steel
Hinge: Visible hinge concealed installation
Sealing strip: EPDM sealing strip
Sill: Panda flower type stainless steel double composite sill
Height: 2280(With high door head)
Size: 2050*860, 2050*960, 2050*1050, 2050*1160



XD-8116

configuration

Door leaf: 1.2 Galvanized steel carving+rear 1.0 galvanized sheet
Door frame: Narrow door bezel
Thickness: 95mm
Level: Class A
Handle: Aluminum through the top long handle
Filler: Partial aluminum honeycomb
Lock: Fingerprint password lock + visual screen system
Structure: T-structure
Hinge: Visible hinge concealed installation
Sill: Stainless steel composite sill
Standard size: 2050*860, 2050*960, 2050*1050, 2050*1160



XD-5057 (Mirror on the back)

HIGH-END ENTRANCE DOOR.



XD-8129

configuration

Facade: 1.0 steel plate Door frame: 2.0 steel plate
Thickness: 95mm Grade: Grade 4
Process: T-shaped open hinge concealed process Handle: mechanical handle
Filling: Partial aluminum honeycomb lock: Standard 9-head lock with C-grade lock core
Hinge: exposed hinge, concealed hinge, lower sill: double-layer stainless steel lower sill
Sealing strip: Foam leather strip
Size: 2050 * 860 2050 * 960 2150 * 960 2250 * 9602050 * 10502150 * 1050 2250 * 1050 2050 * 1160 2150 * 1160 2250 * 1160



XD-8131

configuration

Facade: 1.0 steel plate+inlaid aluminum profile door frame: 2.0 steel plate
Thickness: 95mm Grade: Grade 4
Process: T-shaped visible hinge concealed installation process Filling: Diamond keel foam filling
Lock: K08 Face Fingerprint Lock Body Lock Core: Standard 9-Head Lock C-Class Lock Core
Hinge: exposed hinge, concealed hinge, lower sill: double-layer stainless steel lower sill
Sealing strip: EPDM sealing strip
Size: 2050 * 860 2050 * 960 2150 * 960 2250 * 9602050 * 10502150 * 1050 2250 * 1050 2050 * 1160 2150 * 1160 2250 * 1160



XD-8135

configuration

Facade: Front and Rear Steel Plates
Door Frame: 1.5 Steel Plates
Thickness: 100mm Process: Bright hinge concealed installation process
Filling: Honeycomb board handle: not equipped with handle
Lock body: Standard 9-head lock core: C-grade lock core
Hinge: visible hinge, concealed lower sill: stainless steel double-layer lower sill
Sealing strip: Foam leather strip
Size: 2050 * 8602050 * 960 2150 * 960 2250 * 9602050 * 10502150 * 1050 2250 * 1050 2050 * 1160 2150 * 1160 2250 * 1160



XD-8113

configuration

Door leaf: 1.5 Magnesium alloy steel carving+ rear 1.0 galvanized sheet
Door frame: Grille aluminum wire inlay technology
Craftsmanship: One-stop craftsmanship
Thickness: 90mm
Level: Class A
Handle: Inlaid aluminum handle with light
Filler: Foam filling
Anti-theft: 4mm solid anti-pry steel
Lock: Face recognition fingerprint lock
Structure: T-structure
Hinge: Visible hinge concealed installation
Sealing strip: EPDM sealing strip
Sill: Panda flower type stainless steel double composite sill
Height: 2280(With high door head)
Size: 2050*860, 2050*960, 2050*1050, 2050*1160

HIGH-END ENTRANCE DOOR.



XD-8107

configuration

Door leaf: 1.2 Galvanized steel carving+rear 1.0 galvanized sheet
Door frame: Narrow door bezel
Thickness: 95mm
Level: Class A
Handle: Aluminum through the top long handle
Filler: Partial aluminum honeycomb
Lock: Fingerprint password lock + visual screen system
Structure: T-structure
Hinge: Visible hinge concealed installation
Sill: Stainless steel composite sill Standard
Size: 2050*860, 2050*960, 2050*1050, 2050*1160



XD-8115

configuration

Door leaf: 1.5 Magnesium alloy steel carving+ rear 1.0 galvanized sheet
Door frame: Grille aluminum wire inlay technology
Craftsmanship: One-stop craftsmanship
Thickness: 90mm
Level: Class A
Handle: Zinc alloy mechanical handle
Filler: Foam filling
Anti-theft: 4mm solid anti-pry steel
Structure: T-structure No stuck edge process
Hinge: Visible hinge concealed installation
Sealing strip: EPDM sealing strip
Sill: Panda flower type stainless steel double composite sill
Height: 2280(With high door head)
Size: 2050*860, 2050*960, 2050*1050, 2050*1160



XD-8117

configuration

Door leaf: Surface gold silk with grooves 1.0 galvanized sheet
Door frame: Aluminum profile narrow inlaid door frame
Thickness: 95mm
Level: Class A
Handle: Mechanical handle
Filler: Partial aluminum honeycomb
Structure: T-structure
Hinge: Visible hinge concealed installation
Sill: Stainless steel composite sill Standard
Size: 2050*860, 2050*960,2050*1050, 2050*1160



XD-8118

configuration

Door leaf: Aluminum profile inlaid on the surface Front and rear 1.0 galvanized sheet
Door frame: Narrow door bezel
Thickness: 95mm
Level: Class A
Handle: Mechanical handle
Filler: Partial aluminum honeycomb
Structure: T-structure
Hinge: Visible hinge concealed installation
Sill: Stainless steel composite sill Standard
Size: 2050*860, 2050*960, 2050*1050, 2050*1160

HIGH-END ENTRANCE DOOR.



XD-8119

configuration

Door leaf: The surface of 4mm steel plate is carved+ steel gauze+Small opening door Front and rear 1.5 galvanized sheet
Door frame: Narrow door bezel
Thickness: 95mm
Level: Class A
Handle: Mechanical handle
Filler: Partial aluminum honeycomb
Structure: T-structure
Hinge: Visible hinge concealed installation
Sill: Stainless steel composite sill
Standard
Size: 2050*860, 2050*960, 2050*1050, 2050*1160



XD-8110

configuration

Door leaf: The surface of 4mm steel plate is carved+ steel gauze+Small opening door Front and rear 1.5 galvanized sheet
Door frame: Narrow door bezel
Thickness: 95mm
Level: Class A
Handle: Mechanical handle
Filler: Partial aluminum honeycomb
Structure: T-structure
Hinge: Visible hinge concealed installation
Sill: Stainless steel composite sill
Standard
Size: 2050*860, 2050*960, 2050*1050, 2050*1160



XD-8103

configuration

Door leaf: Surface is 5mm aluminum plate+steel gauze+The small door opens horizontally Front and rear 1.0 galvanized sheet
Door frame: Narrow door bezel
Thickness: 95mm
Level: Class A
Handle: Mechanical handle
Filler: Partial aluminum honeycomb
Structure: T-structure
Hinge: Visible hinge concealed installation
Sill: Stainless steel composite sill
Standard
Size: 2050*860, 2050*960, 2050*1050, 2050*1160




XD-8108

configuration

Door leaf: Surface gold silk with grooves 1.0 galvanized sheet
Door frame: Aluminum profile narrow inlaid door frame
Thickness: 95mm
Level: Class A
Handle: Mechanical handle
Filler: Partial aluminum honeycomb
Structure: T-structure
Hinge: Visible hinge concealed installation
Sill: Stainless steel composite sill
Standard
Size: 2050*860, 2050*960, 2050*1050, 2050*1160

1

ECONOMIC STEEL DOOR.

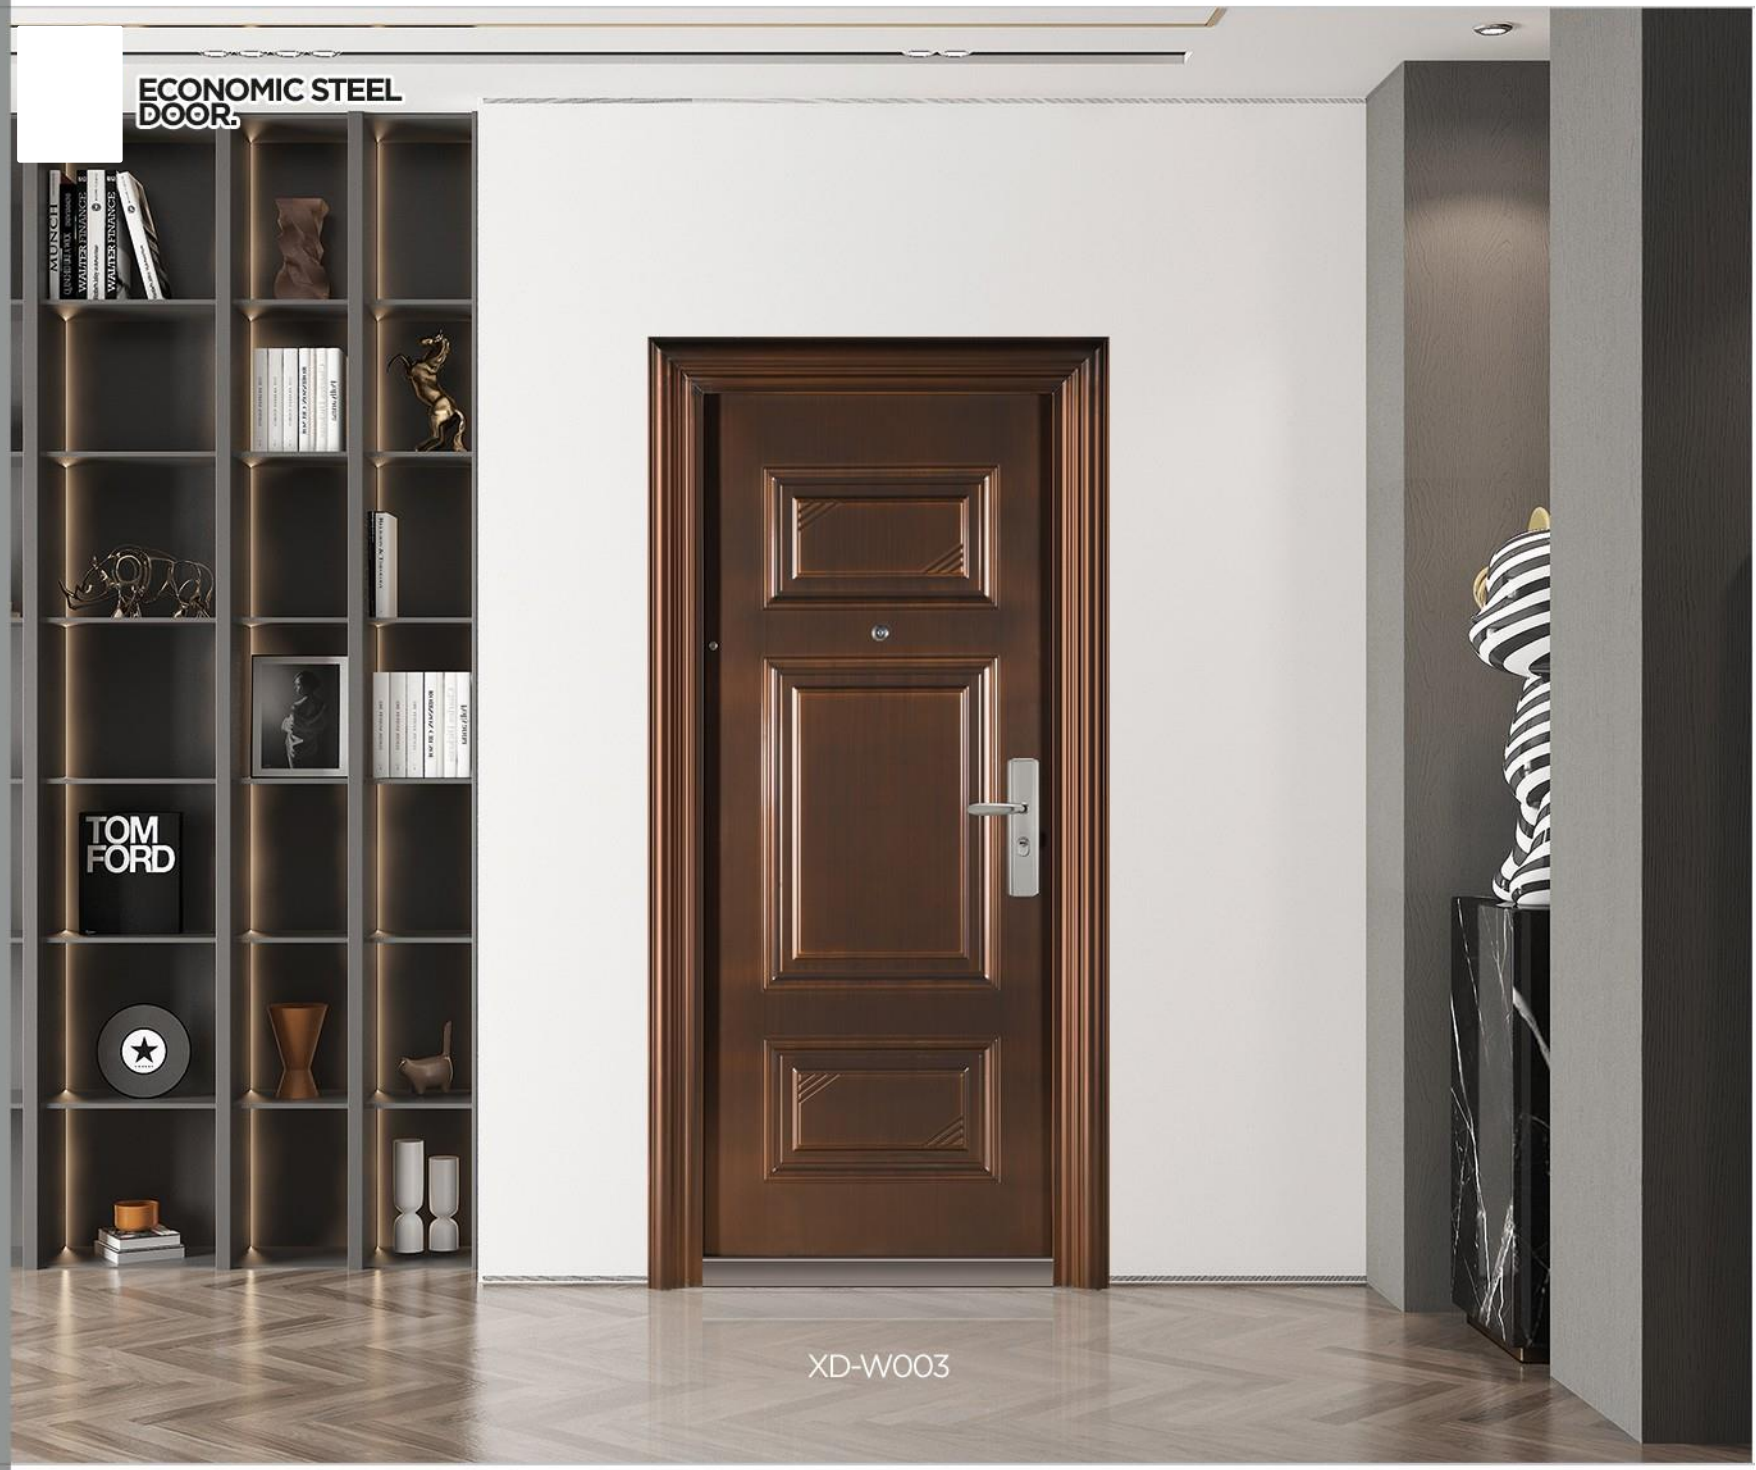

XD-W003

ECONOMIC STEEL DOOR.



XD-W025

configuration

Door size:2100x1000x70
Door thickness:70mm
Steel thickness:0.5/0.8mm
Honey comb paper filling
Powder coating.
Size can be customized.
Standard size:2100x1000
2100x900 2100x1100 2100x1200



XD-W001

configuration

Door size:2100x1000x70
Door thickness:70mm
Steel thickness:0.8/0.6/1.5mm
Honey comb paper filling
Powder coating.
Size can be customized.
Standard size:2100x1000
2100x900 2100x1100 2100x1200



XD-HB

configuration

Door size:2050x960x70
Door thickness:70mm
Steel thickness:0.8/1.5mm
Honey comb paper
Fluorocarbon paint(sun-proof)
Size can be customized.
Standard size:2050x860
2050x960 2050x1050 2050x1160




XD-RT

configuration

Door size:2050x960x70
Door thickness:70mm
Steel thickness:0.8/1.5mm
Honey comb paper
Fluorocarbon paint(sun-proof)
Size can be customized.
Standard size:2050x860
2050x960 2050x1050 2050x1160

ECONOMIC STEEL DOOR.

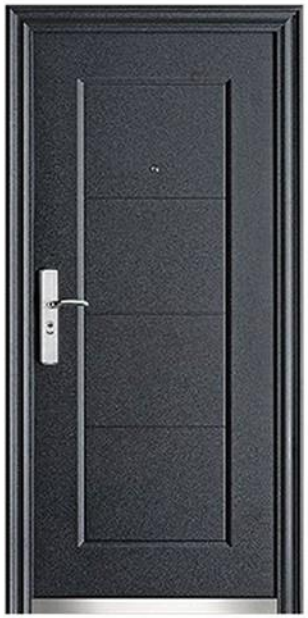

XD-W013



XD-W016



XD-W088



XD-W015



XD-W089



XD-SM8039

ECONOMIC STEEL DOOR.



XD-W087



XD-W012



XD-W014



XD-017



XD-018




XD-W017

AMERICAN PANEL DOOR.



Color


black walnut

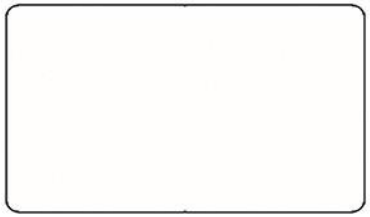
white


red

Door Frame


Steel side frame


Steel top frame


Cross section

AMERICAN PANEL DOOR.



XD-CG03



XD-CG926



XD-CG922



XD-CG904



XD-CG34



XD-CG15

1

STEEL-WOOD DOOR.



STEEL-WOOD DOOR.





STEEL-WOOD DOOR.



XDA-R041





XDA-R042



XDA-R043






XDA-R044

STEEL-WOOD DOOR.



XDA-R045

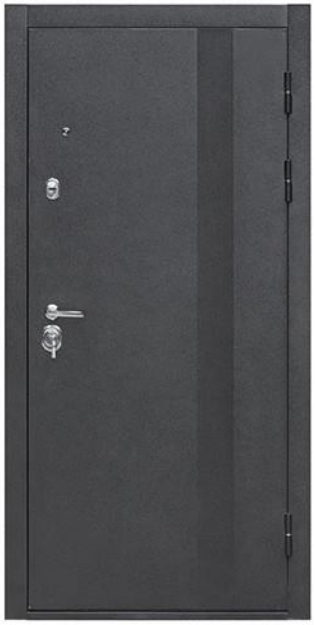

XDA-R048



XDA-R047



XDA-R017




XDA-R029



XDA-R039

2

WOODEN DOOR.

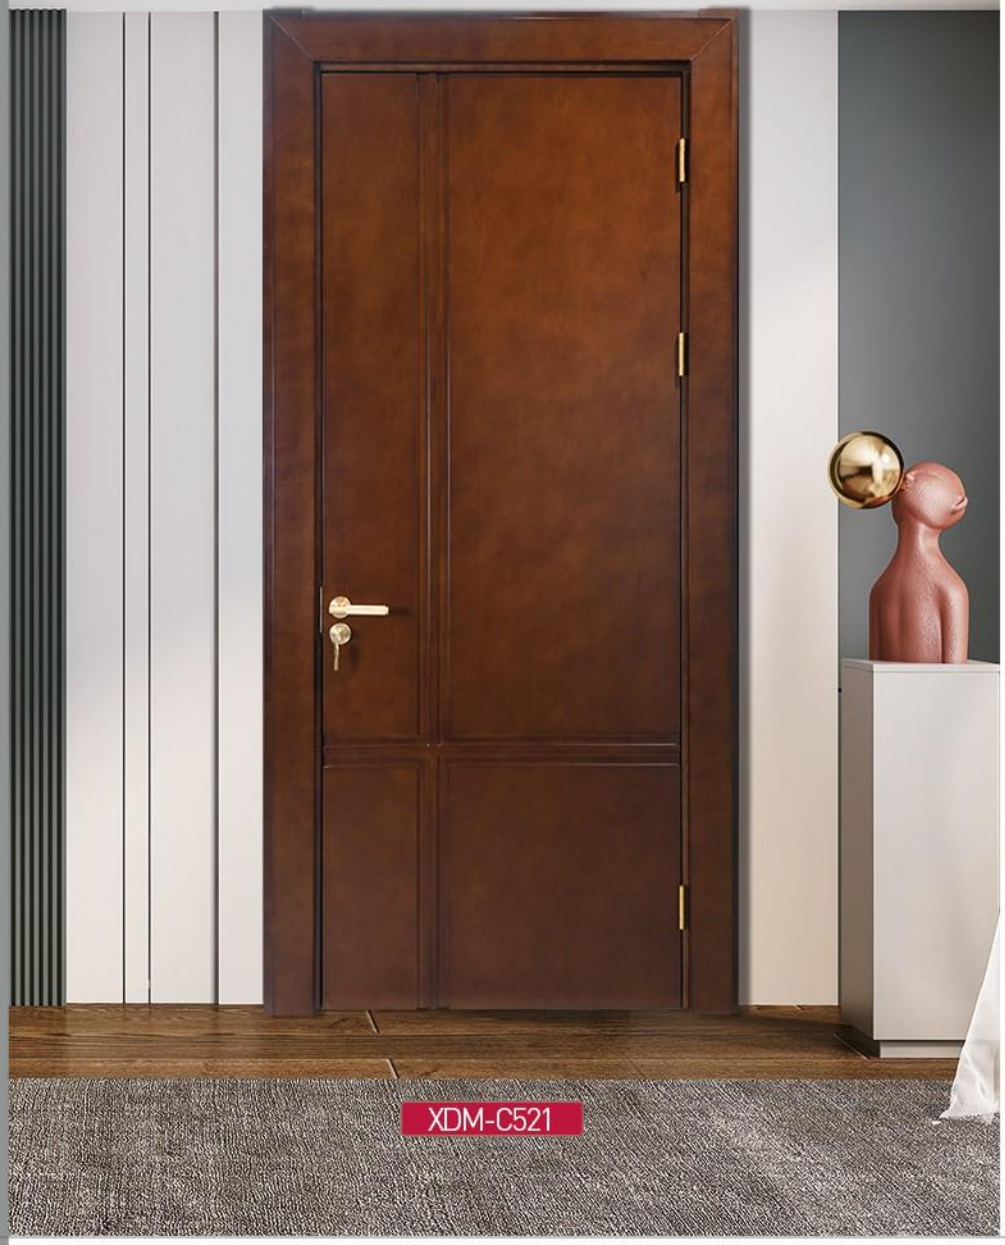

Premium oak doors feature:

- Maximum height of 2400mm
- 7-layer PU baked finish
- Dual-sided waterproof sealing
- CNC milling enables intricate 15mm-deep custom designs
- Genuine or engineered wood veneers
- Thermal-stable construction ensures minimal warping/cracking in high-heat environments
- Thermal-stable (-20° C to 60° C)

WOODEN DOOR.



XDM-A516



XDM-A518



XDM-C520



XDM-A512



XDM-A515



XDM-C522

WOODEN DOOR.



WOODEN DOOR.



XDM-A502



XDM-A503



XDM-D505



XDM-A506



XDM-A507




XDM-A508

WOODEN DOOR.



WOODEN DOOR.



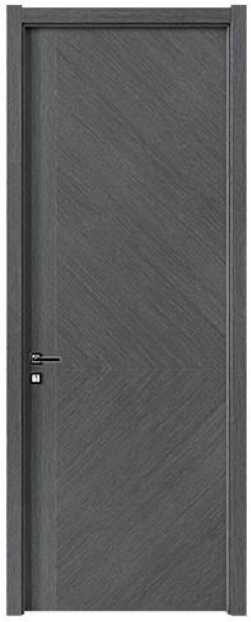

XDMQ-8066



XDMQ-8062

WOODEN DOOR.



XDMQ-8165




XDMQ-8166



XDMQ-8177



XDMQ-8178

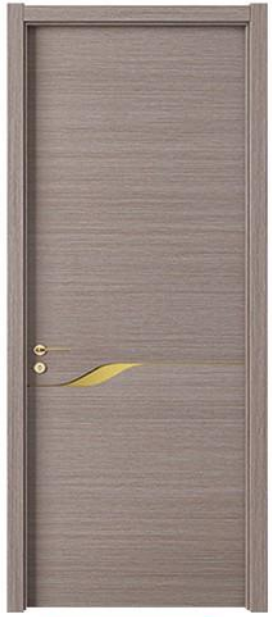

XDMQ-8185



XDMQ-8186

WOODEN DOOR.



XDMQ-8189



XDMQ-8190



XDMQ-8197



XDMQ-8205



XDMQ-8208



XDMQ-8228

WPC DOOR.



Water-proof
Eco-friendly
Non -formaldehyde
Moisture proof
Anti-termite
Sound proof
Antiflaming
More durable
Easy to be installed
Customized
Modern and fashionable

WPC hollow door

Wood Plastic Door



WPC door leaf CAD

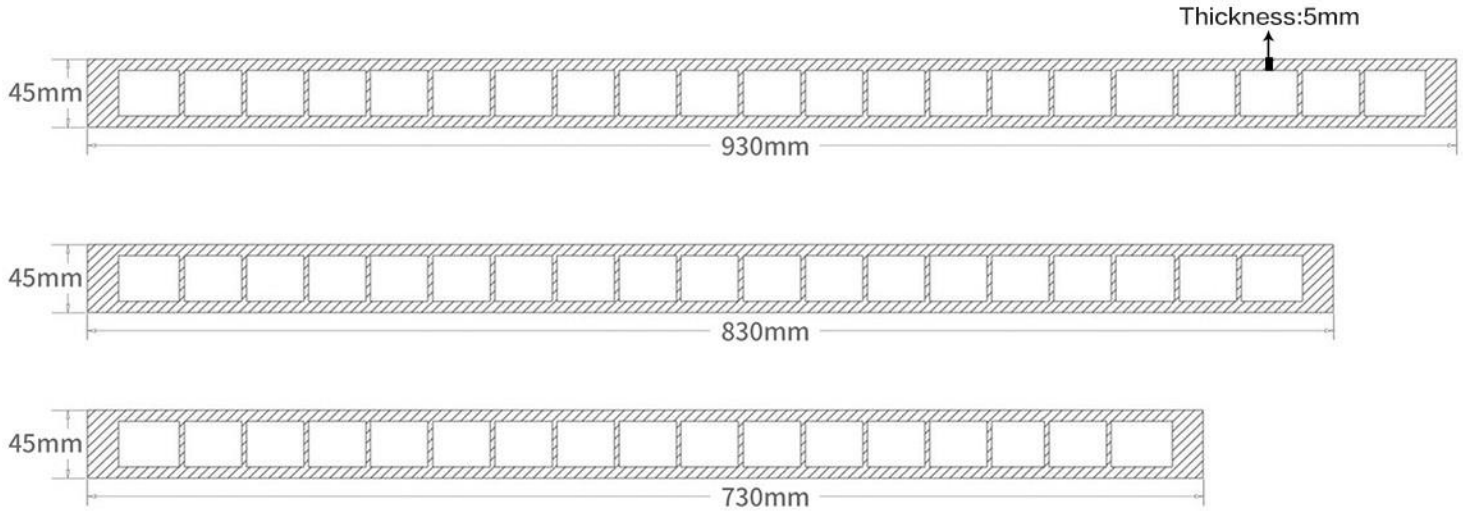

2

WPC DOOR.



8015



8025



8002



8028



8006



WPC DOOR.


9009


9012


9016


Environmentally


Water proof


Durable


Pest control

2 WPC DOOR.









3032



6001



6002



6003



6015



6005



6006



3033



3034

2

PRESSING WPC DOOR.



3035



3036

PRESSING WPC DOOR.



3037



3038

2

PRESSING WPC DOOR.




6013


6013-2


6016


6017


6018


6018-2


6020


6021

PRESSING WPC DOOR.





WPC Frame

PVC Film 0.14mm/0.16mm

2mm/2.5mm WPC Board



XPS Foam Door Core



Solid wood+Honey comb paper



Solid wood+XPS bood




WPC+XPS bood

2

PRESSING WPC DOOR.



3031

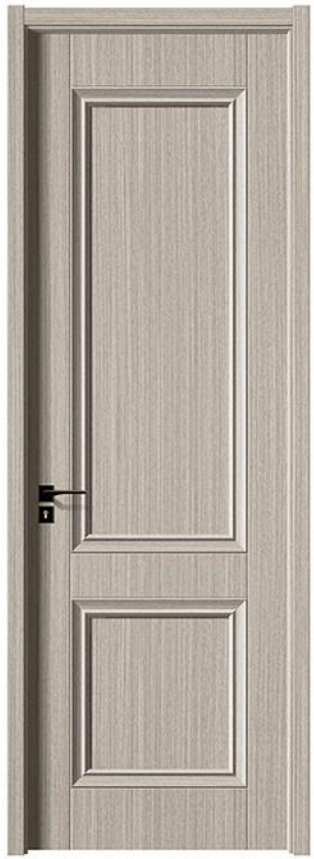


3032



3033

PRESSING WPC DOOR.

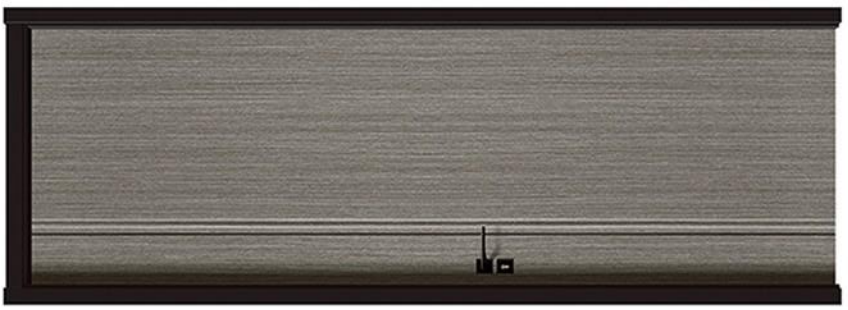

6009



6008





6007

WPC Architrave




Angle architrave
70 × 30mm
60 × 30mm







ARC architrave
100 × 40mm
100 × 80mm






Angle architrave
80 × 60mm
80 × 40mm
100 × 60mm
100 × 80mm






ARC architrave
70 × 30mm






Angle architrave
70 × 31mm





Angle architrave
100*65mm
100*85mm

WPC Door Frame




Angle door frame
32×(100~280)mm





主套90 副套160
Angle door frame
26×360mm





ARC door frame
30×(100~300)mm






Angle door frame
40*120mm



Angle architrave
100*28mm




E style angle door frame
42×（100-140）mm

STEEL FIRE-RATED DOOR.



XD-JH-F01(Yellow style)

STEEL FIRE-RATED DOOR.

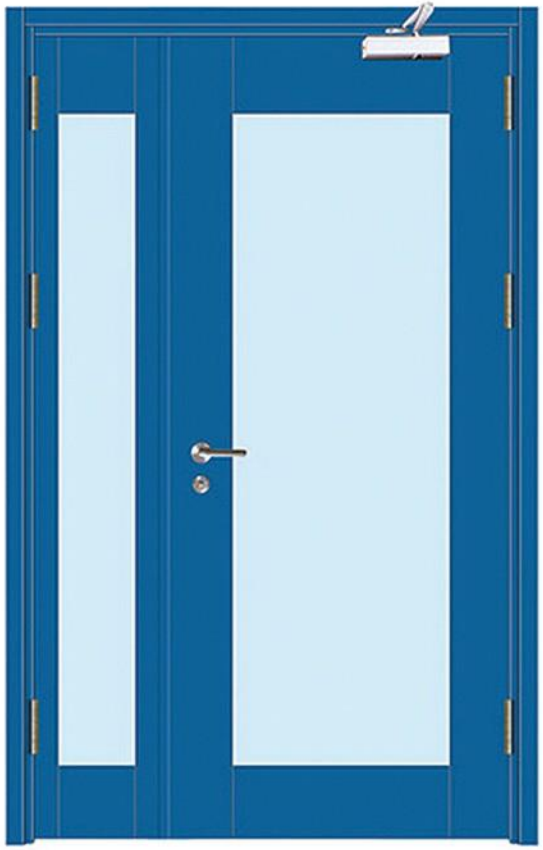

XD-JH-F02(Blue style)




XD-JH-F03(Red style)

STEEL FIRE-RATED DOOR.



Fire resistant door

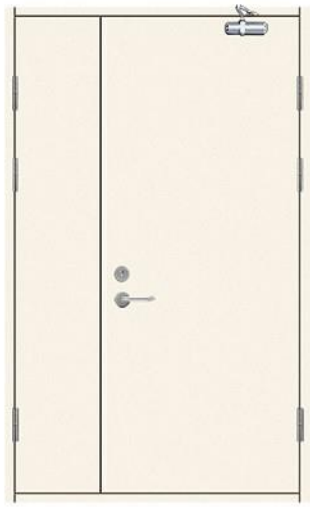

Fire resistant door



Fire resistant door



Fire resistant door



Fire resistant door



Fire resistant door



Fire resistant door



Fire resistant door

WOODEN FIRE-RATED DOOR.



XDM-C526



XDM-C528



STEEL MEDICAL DOOR.



XDM-YL111



XDM-YL112



XDM-YL113



XDM-YL114



XDM-YL115

WPC MEDICAL DOOR.



XD-WYL101



XD-WYL102



XD-WYL103



XD-WYL104



XD-WYL105



XD-WYL106

SMART LOCK



XD-PB46

Lock Body Material:	aluminum alloy die casting
Li-ion Battery:	DC7.4V 4200mA
Working Temprature:	-20℃~+60℃
Color Option:	Silver/Black/Grey
Mortise:	24*240 6068
Language:	Chinese/English/Arabic language
Smart Lock Weight:	≈3.8 kgs
Unlock methods: Card+Fingerprint+Password+ Mechanical key+App Control+NFC+Face recognition	



XD-L1

Lock Body Material:	aviation aluminum alloy
Li-ion Battery:	DC7.4V 4200mA
Working Temprature:	-20℃~+70℃
Color Option:	Silver/Grey
Language:	Chinese/English
Mortise: High grade motor lock,size:35x388 (60-68/70-68)	
Adapted door thickness:	50-120mm
Unlock methods: Card+Fingerprint+Password+ Mechanical key+App Control+NFC+Face recognition	



XD-L3

Lock Body Material:	aviation aluminum alloy
Adaptor with emergency Li-ion Battery:	2600mA
Working Temprature:	-20℃~+70℃
Handle Color Option:	Silver/Black
Language:	Chinese/English
Mortise: High grade motor lock,size:35x388[60-68/70-68]	
Smart LockWeight:	≈1.8 kgs
Unlock methods: Card+Fingerprint+Password+ Mechanical key+App Control+NFC; No Face recognition	



XD-ZJ01

Dimensions: 320*W73mm
Working voltage: DC 6V (4 alkaline AA batteries)
Working humidity: 20%-90%
Anti-static: >1500V
Features: Can be opened with mobile phone via Bluetooth, the lock does not need to be connected to the internet



XD-Z313

Main functions: fingerprint/password/card swiping/mechanical/mobile app/optional 3D facial recognition
Product Name XD-Z313 Material Aluminum Alloy
Lock core grade exceeds C-grade. Surface treatment of lock core: electrostatic powder coating
Display screen size 4.5 inches IPS screen facial recognition 3D binocular technology
Password length 6-10 digits, total length not exceeding 16 digits fingerprint recognition semiconductor
Information capacity 100 sets of cameras 720P H62 infrared 850 lens
Unlocking method: fingerprint+password+remote APP unlocking+card swiping+mechanical key Power supply method: 7.2V-8.4V



XD-Z601S

Main functions: Palm vein/3D face/fingerprint/password/card swiping/mechanical/-mobile remote unlocking
Unlocking method: Palm vein recognition/facial recognition/mobile remote app/fingerprint/password/card swiping/key/one-time key
Main material CNC precision carving process fingerprint parameter capacity 100 pieces/semiconductor fingerprint sensor/rejection rate ≤ 0.15%/false recognition rate ≤ 0.0004%
Working voltage: Lithium battery 7.4V Cat's eye parameters: 1 million images/lens wide-angle 155 degrees/lens resolution 1280X720
Battery cycle 3-6 months with Type-C charging interface facial module working range 30-60mm/rejection rate ≤ 0.01%/false recognition rate ≤ 0.0001%
Working environment Operating temperature -25 ° C-70 ° C/Relative humidity 15% RH-93% RH Display screen 854 * 480/4.5 inches
Suitable for door thickness support: Heaven and earth hook/45-110mm prompt alarm, trial and error alarm/anti pry alarm/low power alarm/stay alarm



XD-A10

Lock Body Material:	Alu Alloy
Li-ion Battery:	DC7.4V 4200mA
Working Temprature:	-20℃~+60℃
Color Option:	Black/Red/Blue
SIZE: Front Panel:	400*60*76mm
Back Panel:	403*60*80mm
Smart Lock Weight:	≈4 kgs
Unlock methods: Card+Fingerprint+Password+ Mechanical key+App Control+NFC+Face recognition;	



XD-ZX10

Lock Body Material:	Alu Alloy
Battery:	4 pieces of AA alkaline batteries
Working Temprature:	-20℃~+60℃
Color Option:	Black
SIZE: Front Panel:	363*75*10mm
Back Panel:	363*75*10mm
Adapted door thickness:	40-120mm
Unlock methods: Card+Fingerprint+Password+ Mechanical key+NFC	



XD-ZC1
(Wooden door handle)

1. One-character ecological lock: 24 per box
2.The dimensions of the color box (length * width * height (cm) : 24.5×22.4×5.9
3. The dimensions of the outer box (length * width * height (cm) : 51.5×46.5×38
4.Gross weight/bunch: 803.5 groms
5. Gross weight per box: 20.8 kilograms
6. Material: Aluminum alloy
7. Functions: Fingerprint, password, Doodle Bluetooth, remote temporary password (valid for 5 minutes), Doodle Bluetooth setting password time, key

HANDLE




HARDWARE




INTRODUCTION TO ANTI-THEFT DOORS



MEASUREMENT

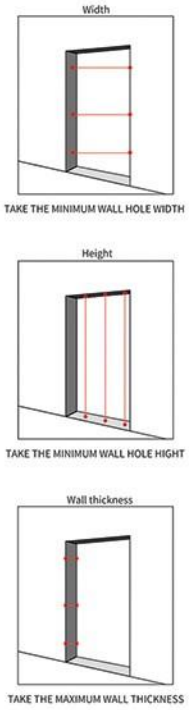


OPENING DIRECTION

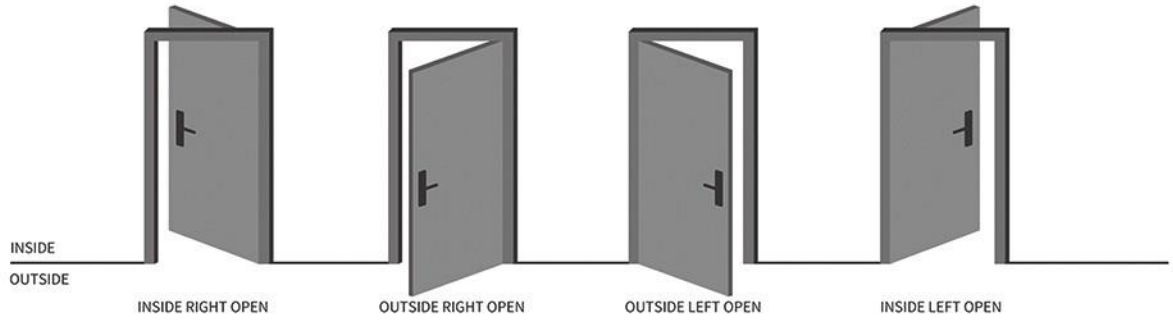

ANTI-THEFT DOOR FILLING OPTIONAL



PU FOAM



HONEYCOMB PAPER



ALUMINUM FOIL FILLING

FIRE DOOR INSULATION OPTIONAL



ROCK WOOL



FIREPROOF BOARD

FIRE DOOR HARDWARE

















HANDLE



G-7560



G-7560H



G-7562



FC-02



G-C075